




Product Image



Specification

- Size: 90Lx35Wx28H(mm)
 - Input : DC12V
 - Contact rating: 1A@30VDC
 - Output contact: NO\NC\COM
 - Mechanical life: 1,000,000 tests
 - Suitable for door: Hollow Door
 - Detection range: 5-20cm(Adjustable)
 - Time delay: 1~25s(Adjustable)
 - Current: Standby 40mA, Action 70mA
 - Operating temp: -20°C ~+55°C (-4-131°F)
 - Suitable humidity: 0-95% (relative humidity)
- LED Indicator:
- Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Material: 304Stainless
 - Weight: 0.14 kg

Installation & Size

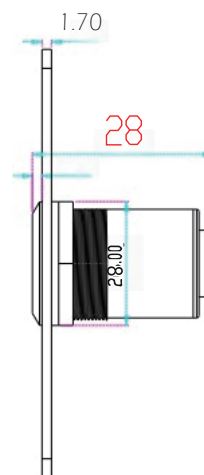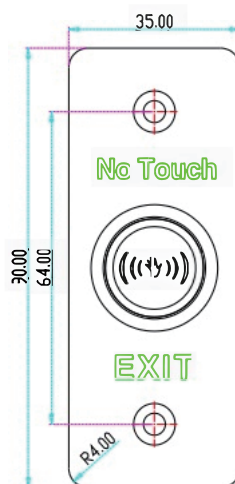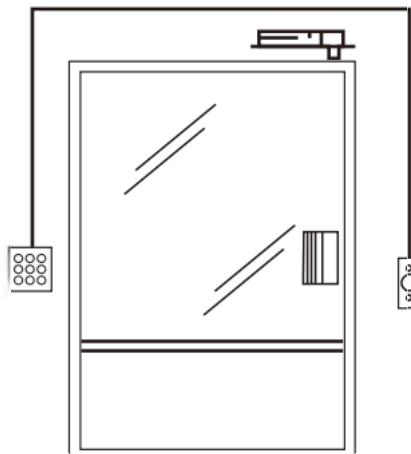

Installation



Time Delay:0.3S-30S



Turn left short



Turn right long



Detection range:5-20cm(Adjustable)



Turn left near



Turn right far