

Product model: EL128



EL128 Product Show



two-channel




Single channel

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Equipped with power-off and pole dropping function, remote control can also be added for pole dropping control;
- 3、 LED indicator, valid card showing green, illegal card showing red;
- 4、 Card can be set "with memory" or "without memory";
- 5、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6、 Compatible with IC, ID card, scanning and face recognition;
- 7、 With unified and standard external electrical interface to facilitate system integration;
- 8、 Extensible to realize access control, attendance, fees and other functions;
- 9、 Can be used outdoors completely, one machine can be used as a lane.

Product

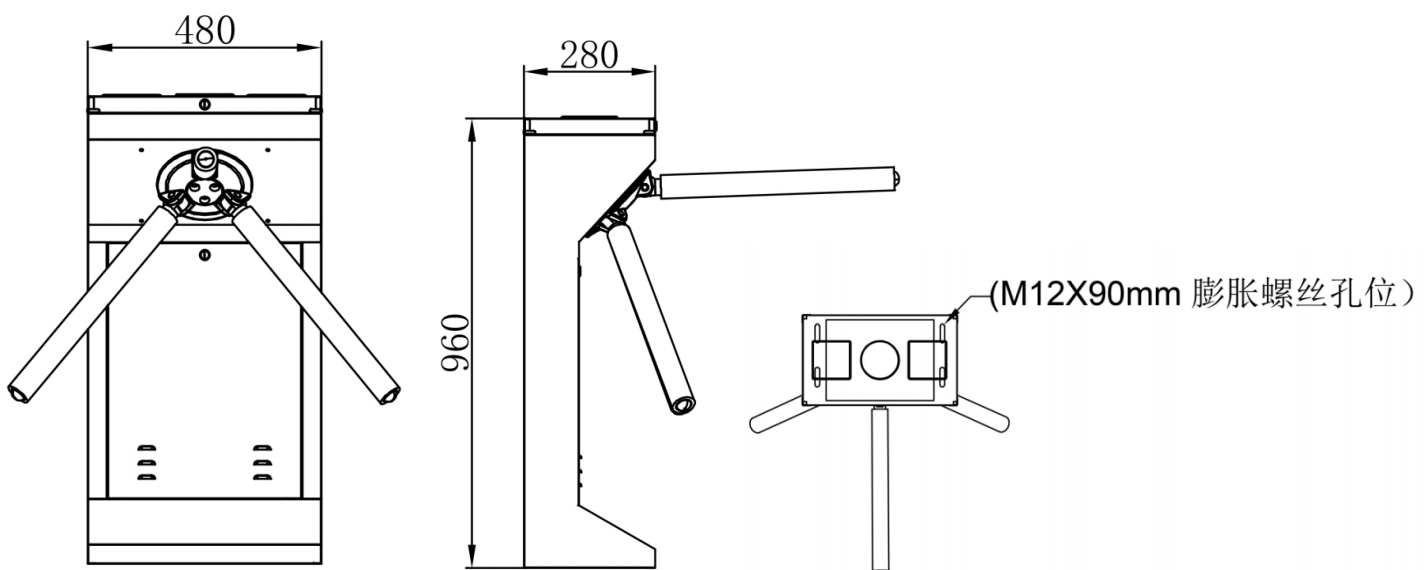

Parame-

Size (L*W*H)	480*280*960mm
Pass width	550mm4
Power	35W
Material	Top $\delta=1.2\text{mm}$ / body $\delta=1.0\text{mm}$ SUS304
Bar Material	SUS201
Movement	Semi-Auto tripod turnstile movement with anti-pass back function
Indicator Light	Dynamic indicator light
Power Supply	24V 50W
Control Unit	Main board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Product model: EL128

Case share

