


Life
made
easy

BORDER 400

ELECTROMECHANICAL BARRIER
FOR RESIDENTIAL, INDUSTRIAL
OR PUBLIC USE

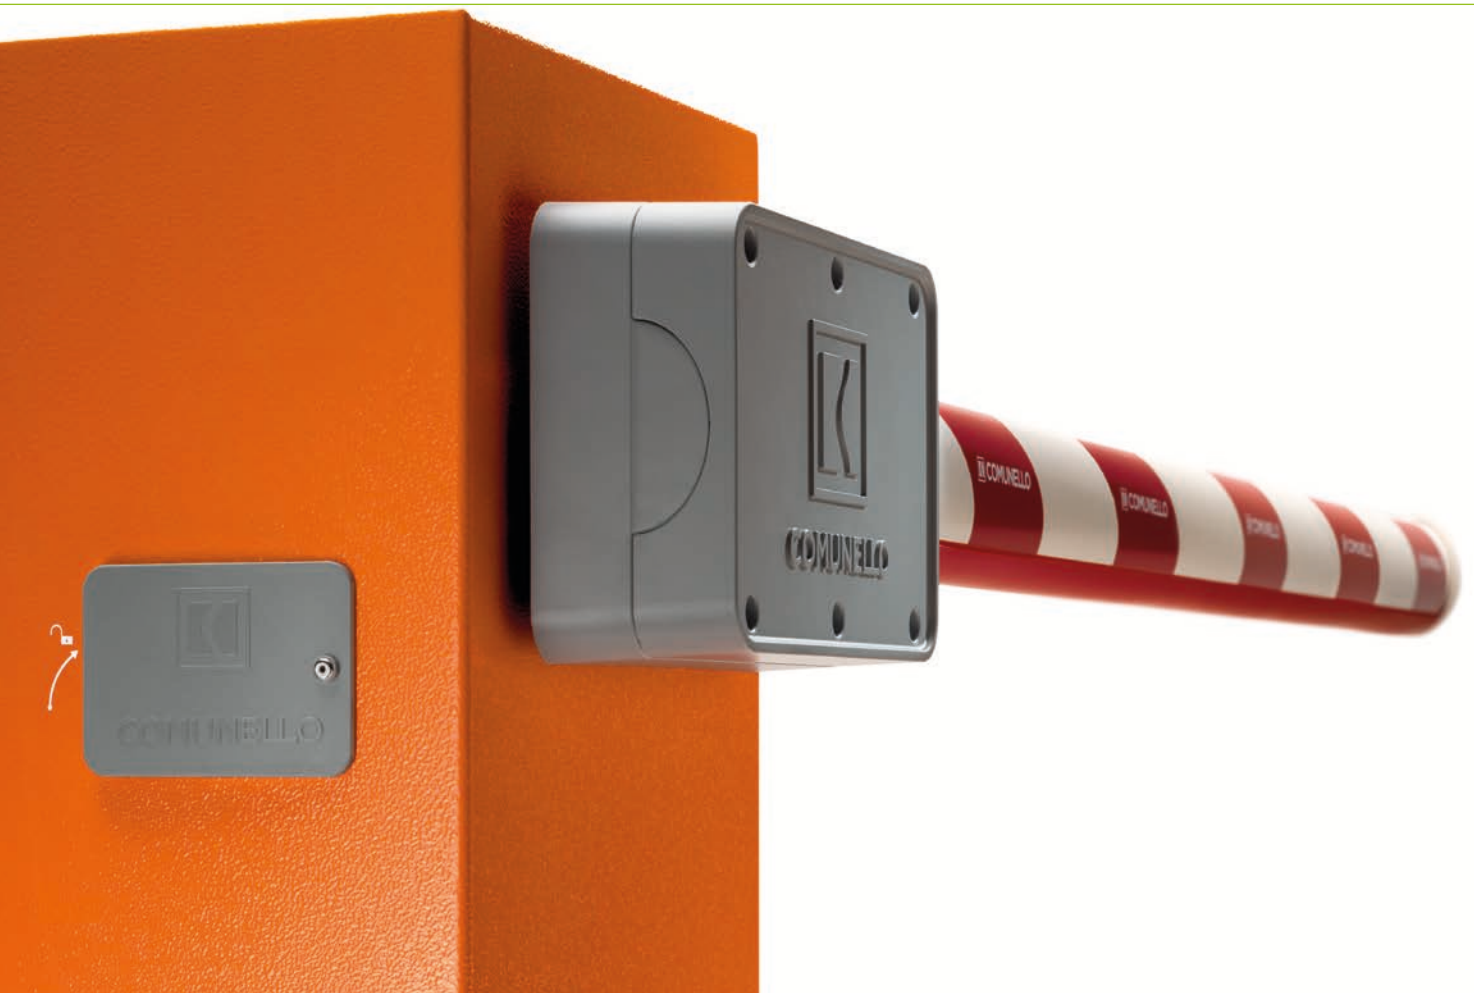

BORDER

Technical features

Start of the slowdown phases adjustable by dip-switches. Thanks to the adjustable cams it is possible to change the slowdown starting points according to the needs.

Mechanical stop adjustment by one screw

Spherical self-lubricating eyelet-fixed spring for smoother, wear reducing movement

A single spring can be fixed in 2 different holes of the spring tensioning arm according to the different bar length

Manual unlocking system available from both sides by aluminium handle

Robust ambidextrous bar support in die-cast aluminium

Easily accessible and extractable built-in control board for appropriate programming

Light and durable elliptical section beam




Every single product is duly tested at the end of each assembly line

TECHNICAL CHARACTERISTICS

	BORDER 400 24V
Power supply	230 VAC
Motor power supply	24 VDC
Power consumption	150 W
Current input	6,2 A
Torque	100 Nm
Duty cycle	Intensive use
Protection rating (IP)	IP44
Insulation class	2
Working temperature	-20°C / +50°C

DIMENSIONS (mm)

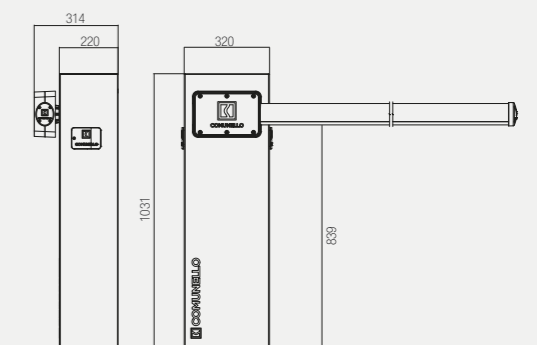

Robust steel frame with protective treatment

For beams up to 4 m in length





OFFICIAL DEALER:

 **COMUNELLO**
AUTOMATION

AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33

36027 San Giuseppe di Cassola, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79

36027 Rosà, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com