

# DS-KD8003Y-IME2/S

**Hikvision**



- Hikvision
- 2-wire Video intercom with 2 Mpx camera
- Wide angle lens
- Built-in speaker and microphone
- IR night vision
- TCP/IP connection by DS-KAD70xY
- Remote monitoring via iVMS-4200, Hik-Connect mobile app or indoor monitor software
- Remote door opening
- Surface mount or flush mount with bracket (not included)
- Retro-illuminated name tag
- Suitable for exterior IP65
- Can be integrated with Hikvision modules
- Stainless steel

## Features

- Video intercom 2 wire
- 2 MP camera
- Bidirectional audio
- Mobile App via monitor
- Suitable for exterior IP65
- Modular

## Specs

**Brand**

Hikvision

**Model**


DS-KD8003Y-IME2/S

**Operating system**

Linux

**Image sensor**

Low Illumination 2 Mpx IR

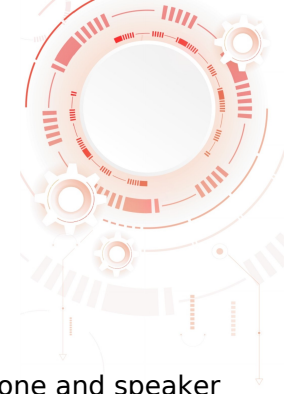

**Image Functions**

**Viewing angle**

**Audio**

**Keypad**

**Outputs**

**Inputs**

**Remote access**

**Network interface**

**Modular**

**Power**

**Degree of protection**

**Material**

**Temp. operation**

**Dimensions**

**Weight**

BLC / WDR / DNR

H: 146°, V: 82°, D: 180°

Bidirectional audio with microphone and speaker

Mechanical button with LED backlit name-tag

2 x lock relay, 1 x module output, 1 x DC 12 V / 500 mA max.

4 x auxiliary inputs (output button, feedback, door sensor), 1 x tamper

Software iVMS-4200

Hik-Connect mobile application

Network connection through 2 threads / SIP protocol 2.0

Compatible with Hikvision modular boards

DC 24 V with hub 2 wires / 12 V / 1700 mA max.

Suitable for exterior IP65

Plastic and stainless steel

-40° C ~ +60° C

98 (H) x 100 (W) x 42 (D) mm

410 g

**Package content**

- Hikvision Video Intercom Outdoor Panel
- Mounting material
- User instructions