


CODE: **AWO256 v1.7**  
 NAME: **17/TRZ50/SATEL**

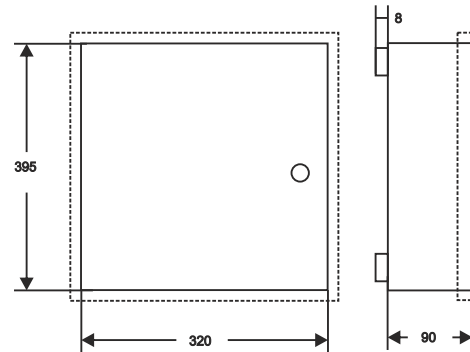

## DESTINATION

### SATEL:

- 1) CA6,10, VERSA 5,10,15, INTEGRA 24,32 + 4x CA10E ( CA64E, SM, MST1)
- 2) CA6,10, VERSA 5,10,15, INTEGRA 24, 32 + 3 x CA10E ( CA64E, SM, MST1) + CA64 ( EPS, O-OC, O- ROC, O-R, VGM-16, SR, ADR, ACC-KP-PS)
- 3) CA 6, 10, VERSA 5,10,15, INTEGRA 24, 32 + CA64 ( E, SM, MST1) + 2 x CA64 ( EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)
- 4) INTEGRA 64, 128 + 3 x CA64E ( CA10E, SM, MST1)
- 5) INTEGRA 64, 128 + CA64E ( CA10E, SM, MST1) + CA64 ( EPS, O- OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)

### MODULES:

- 1) CA64 ( PP, OPS- OC, OPS-R, OPS- ROC, EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS) + 4 x CA64E ( CA10E, SM, MST1)
- 2) CA64 ( PP, OPS-OC, OPS-R, OPS-ROC) + CA64 ( EPS, O-OC, O-ROC, O-R, VGM16, SR, ADR, ACC- KP-PS) + 3 x CA6 ( CA10E, SM, MST1)
- 3) 2 x CA64 ( EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP-PS) + 3 x CA64E ( CA10E, SM, MST1)

## DANE TECHNICZNE

<b>Dimensions:</b>	<b>internal:</b> W=320, H=395, D=90 <b>external:</b> W1=325, H1=400, D1=98mm [mm, +/-2]
<b>Weight net/gross:</b>	4,00kg / 4,20kg [ +/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	TRZ 50VA/16V/18V/20V in the case of PC/ABC in class UL94-V0, IP43
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 250mA (max.)
<b>Power supply output:</b>	U1=16V/AC or U2=18V/AC or U3=20V/AC (-5%, +15%), I1=3,0A or I2=2,8A or I3=2,5A (max.)
<b>Operating environment:</b>	class II , -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5A@50V/DC max. NC
<b>Closing:</b>	screwed x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
<b>Certification, declaration:</b>	CE, RoHS